




BUMLING MINI

MEMBER OF THE FAGERHULT GROUP

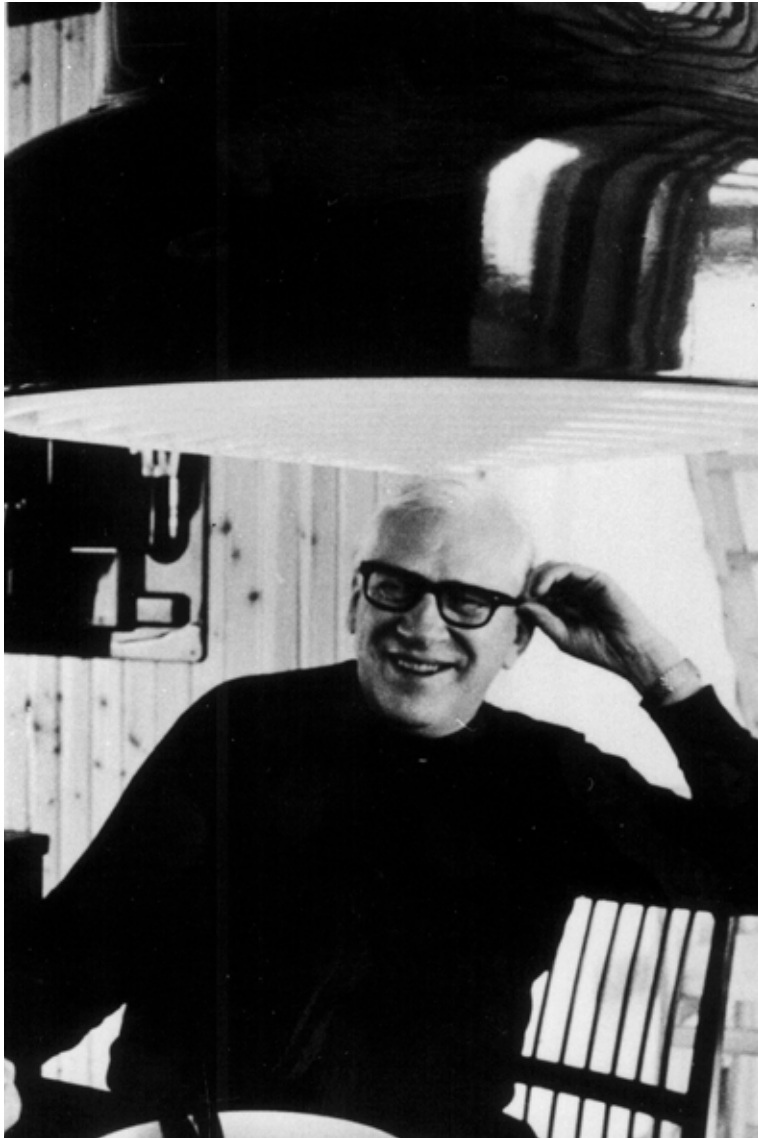

BUMLING MINI

"It's like a big boulder, Anders!" a friend of designer Anders Pehrson is believed to have said, when he saw the new pendant lamp at the lighting exhibition in Gothenburg in 1968. The lamp was bulky, British racing green and 60 cm in diameter. This was the birth of Bumling, a Swedish design classic. Now we are re-releasing the classic in two original sizes, 190 mm & 250 mm.











TABLE



FLOOR



PENDANT



WALL





OUTDOOR



FACTS

- Material:** Shade in spun aluminium.
- Installation:** Pendant / Wall / Table / Floor
- Connection:** Bumling indoor: **Pendant** supplied with 3 m halogen free white textile cable 2G0.75 mm². Ceiling cup with terminal block 2x2.5 mm² and lamp plug. **Table** and **Floor** supplied with 2.5 / 3 m halogen free white cable 2G0.75 mm². Dimmable. **Wall** supplied with terminal block in junction box 3x2.5 mm². Dimmable. Bumling outdoor: Wall mounted junction box including IP55 classed terminal block 3x2.5 mm².
- Standard finish:** Bumling indoor: White NCS 0500-N G90. Colour can be chosen for a set up fee. Bumling outdoor: Anthracite grey ~ RAL9023 textured, Aluminium grey ~ RAL9006 textured or Black RAL9005 textured.
- Diffuser:** Bumling indoor: Circular grid in opal acrylic combined with diffuser film. Bumling outdoor: The luminaire is supplied with an IP65 class AC module which has an opal diffuser.
- Light source:** Includes 230V LED light source, colour temperature 2700K. **Colour rendering:** CRI 80. **Chromaticity tolerance:** max 3 SDCM. **Lifespan:** L80B10 50 000h (indoor), L70 50 000h (outdoor). Or selectable GU10 light source.

Design: Anders Pehrson
Protection Category: 2
Ingress Protection: IP20 (indoor), IP55 (outdoor)